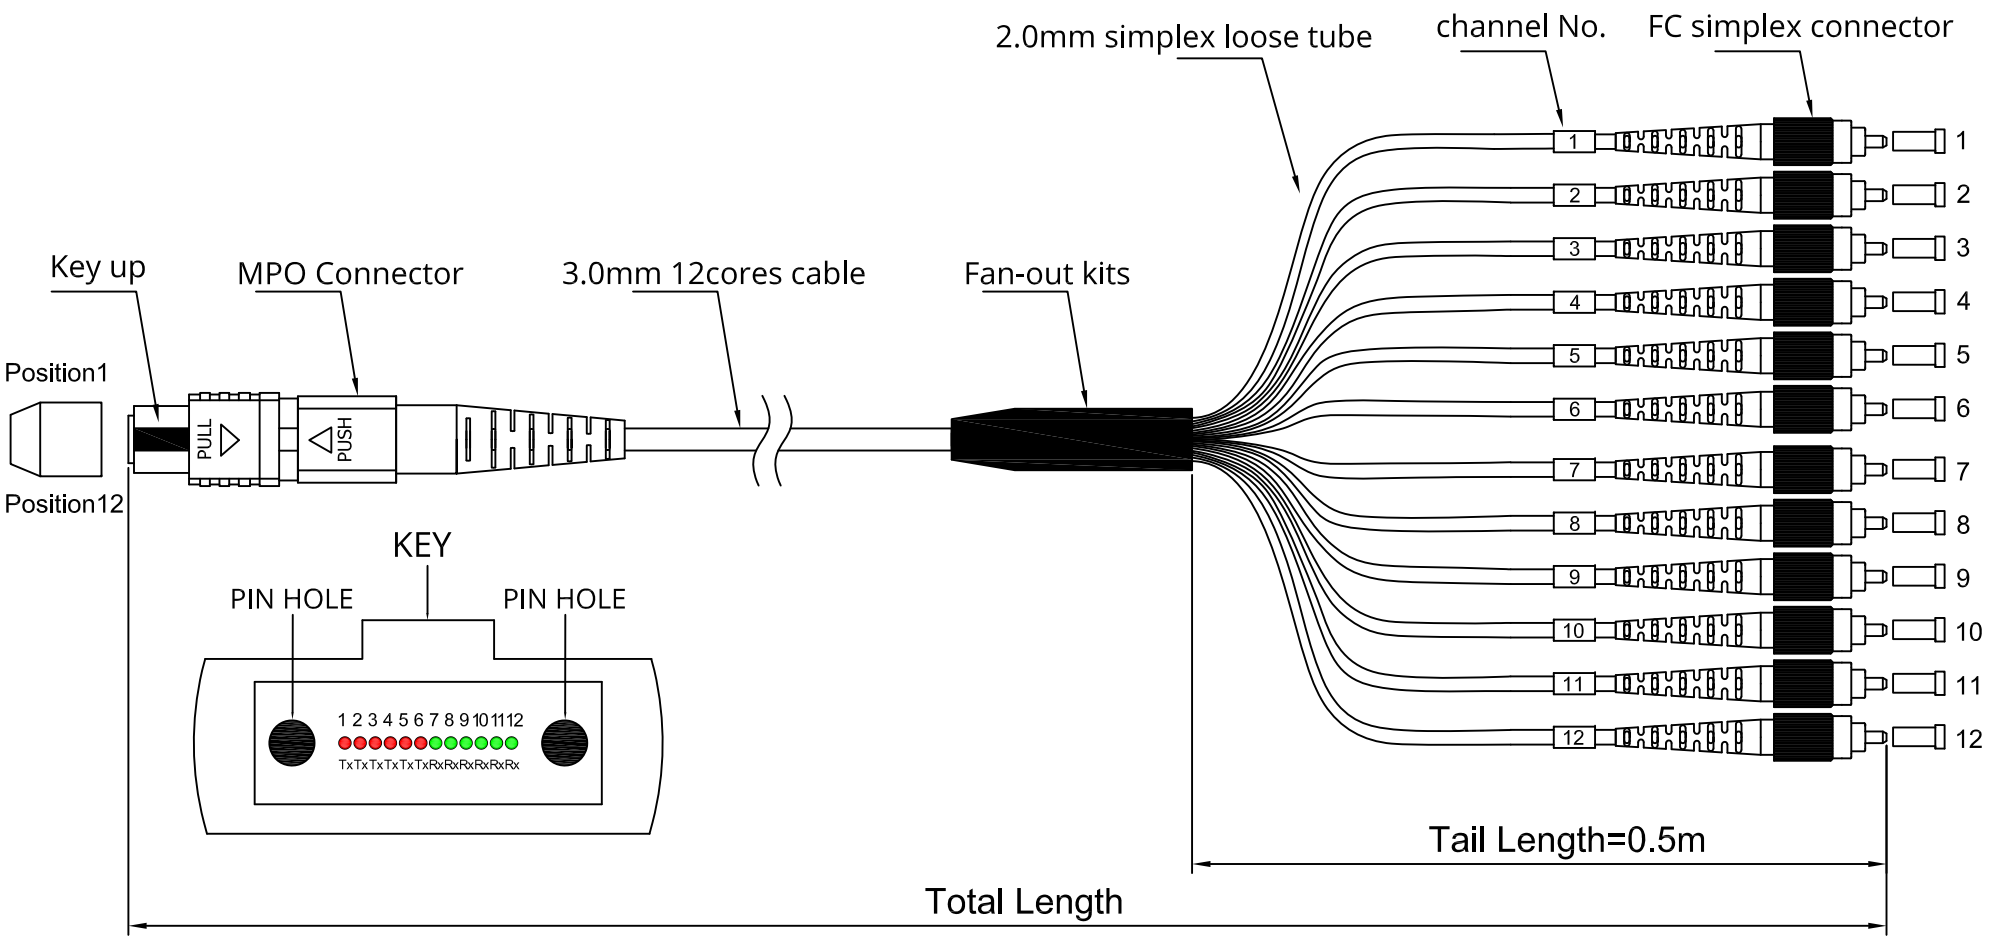


SPECIFICATIONS

Cable&Fiber	12Cores OM3 fiber OD.=3.0mm LSZH Aqua color cable
Connector	12cores MPO/APC Female to 12xFC/UPC Simplex
Tested Wavelength	850&1300nm
Insertion Loss	Low loss: MPO≤0.35dB,LC≤0.20dB
Repeatability	≤0.1dB
Durability	MPO:≤0.2dB typical change,500matings； FC:≤0.2dB typical change,1000matings
Interchangeability	≤0.2dB
Operating Temperature	-40°C~+85°C

LENGTH TOLERANCE

Length (L)	Tolerance
L＜1M	+150mm/-0
1M ≤ L＜10M	+150mm/-50mm
10M ≤ L＜30M	+200mm/-50mm
30M ≤ L	+1%/-0

TITLE	MPO/A-FC/U 12C OM3 Patchcord		
DWG NO.	21509LFU	DATA	2020.09.16